

PERSEO TESATA
FOGLIO ISTRUZIONI



PERSEO CABLE SYSTEM
INSTRUCTIONS DATASHEET

- Prima di procedere all'installazione leggere attentamente queste istruzioni e conservarle per la manutenzione.
- Montaggio ed avviamento devono essere eseguiti solo da personale specializzato
- L'apparecchio va installato in conformità alle leggi nazionali in vigore.
- In funzione del progetto di impianto, Tecnoilluminazione fornisce gli alimentatori per LED più idonei, lo schema elettrico con l'evidenza della tipologia di cavi, la colorazione delle polarità e i tipi di collegamento.


- Before installation read these instructions carefully and keep them for maintenance.
- Installation and commissioning must be performed by qualified personnel
- The device should be installed in accordance with national laws in force.
- According to the draft system, Tecnoilluminazione provides the most suitable LED ballast, the circuit diagram with the evidence of the type of cable, the color of the polarity and connection types.

ATTENZIONE!

- Disinserire la tensione di rete durante il collegamento e scollegamento per non danneggiare i LED
- Non gettare le apparecchiature elettriche tra i rifiuti domestici

**WARNING!**

- Switch off the mains when connecting and disconnecting to avoid damaging the LEDs
- Do not dispose electric tools together with household waste

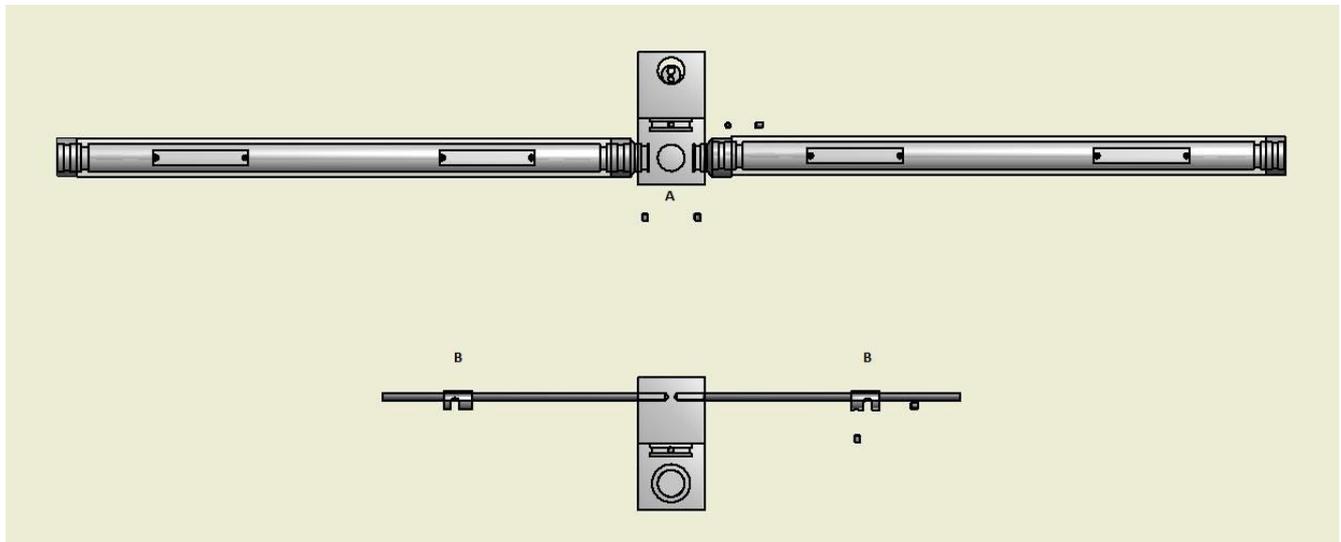

1. Disinserire la tensione di rete.
2. Assicurarsi che la tensione di rete e la potenza dell'alimentatore/ trasformatore siano compatibili con l'alimentatore e la potenza assorbita.
3. Fissare a parete la tesata.
4. Posizionare il corpo lampada sulla tesata mantenendo la polarità corretta:
 - a) fare scorrere gli agganci (B) in corrispondenza dei conduttori della tesata, allentando e stringendo il grano inferiore.
 - b) bloccare il conduttore all'aggancio (B) stringendo il grano laterale
5. Regolazione – registrazione del corpo lampada
 - per orientare singolarmente ogni modulo lineare: allentare leggermente le viti senza testa (grani) poste sulla faccia inferiore del modulo di supporto (A). Regolare la lampada e serrare le viti senza testa.
 - Per ruotare il tubo di PMMA nella posizione trasparente o satinata, ruotare il tubo di PMMA sino alla posizione desiderata.
 - per ruotare tutta la lampada sull'aggancio al binario (B): allentare leggermente la/le viti senza testa (grani) poste sulla/e facce laterali del modulo di sostegno (A). Ruotare la lampada e serrare le viti senza testa.

Per la sostituzione del LED contattare l'azienda Tecnoilluminazione.

1. Disconnect the power supply
2. Make sure the voltage and power transformer are compatible with the power supply and power consumption.
3. Fasten the cable system to the wall.
4. Place the lamp on the tightened cable maintaining the correct polarity:
 - a) slide the hooks (B) at the core of the tightened cable, loosening and tightening the lower grain
 - b) to stop hooking the wire, tighten the side grain
5. Adjustment of the lamp body
 - to guide each individual linear form: loosen the set screw (grains) located on the lower surface of the support module (A). Adjust the lamp and tighten the set screws.
 - to rotate the PMMA tube to the transparent or satin position just turn the PMMA tube
 - to turn all the lamp on the track (B): slightly loosen set screws (grains) on the lateral sides of the module support (A). Turn the lamp and tighten the set screws.

To replace the LED contact Tecnoilluminazione company.

Tecnoilluminazione - 37129 Verona - Italy

<http://www.tecnoilluminazione.it> info@tecnoilluminazione.it

